



BOBRICK

DESIGN

DURABLE

COMPLIANT

Privacy Partitions

PRIVACY PARTITIONS



Architects and designers acknowledge that privacy is playing an increasingly vital role in washroom design. Bobrick answers these needs with privacy options on all of our toilet partitions.


PRIVACY PROBLEMS


- Standard 12" (305 mm) floor clearances on partition doors.
- Gaps between doors and stiles found on typical toilet partitions.
- Door latch bolts that do not lock all the way causing doors to open unintentionally.

BOBRICK SOLUTION

- Bobrick partitions in all materials are available in standard 72" (1829 mm) tall doors and panels with 4-5/16" (110 mm) floor clearances. Other heights and floor clearances available upon request.
- Bobrick door hardware is designed for secure latching when installed properly - while maintaining the emergency access feature.
- Compact Laminate (CL) and Solid Core Reinforced Composite (SCRC) partitions feature an integrated Gap-Free Option to achieve no sightlines between doors and stiles. Interlocking doors and stiles are routed 0.300" (7.6 mm) from the edge to allow for 0.175" (4.4 mm) overlap.

GAP-FREE OPTION (G)

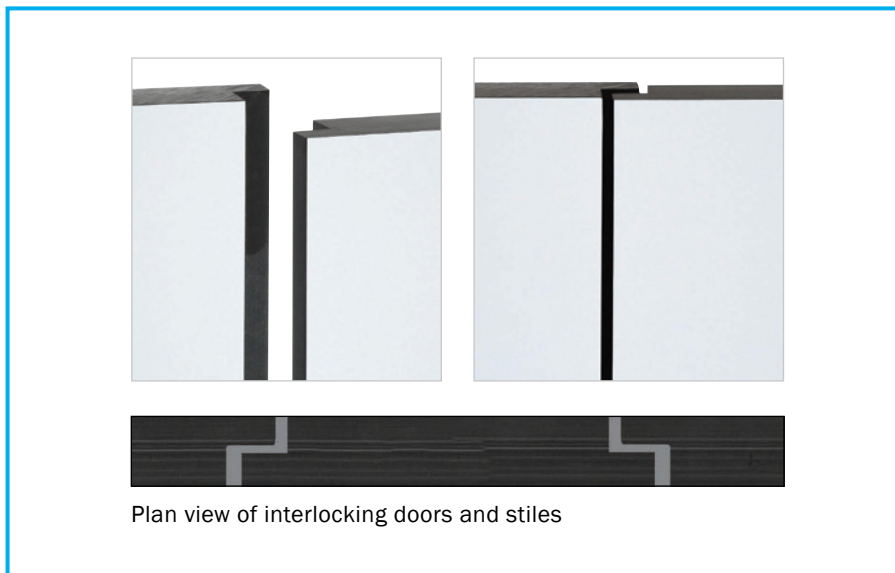

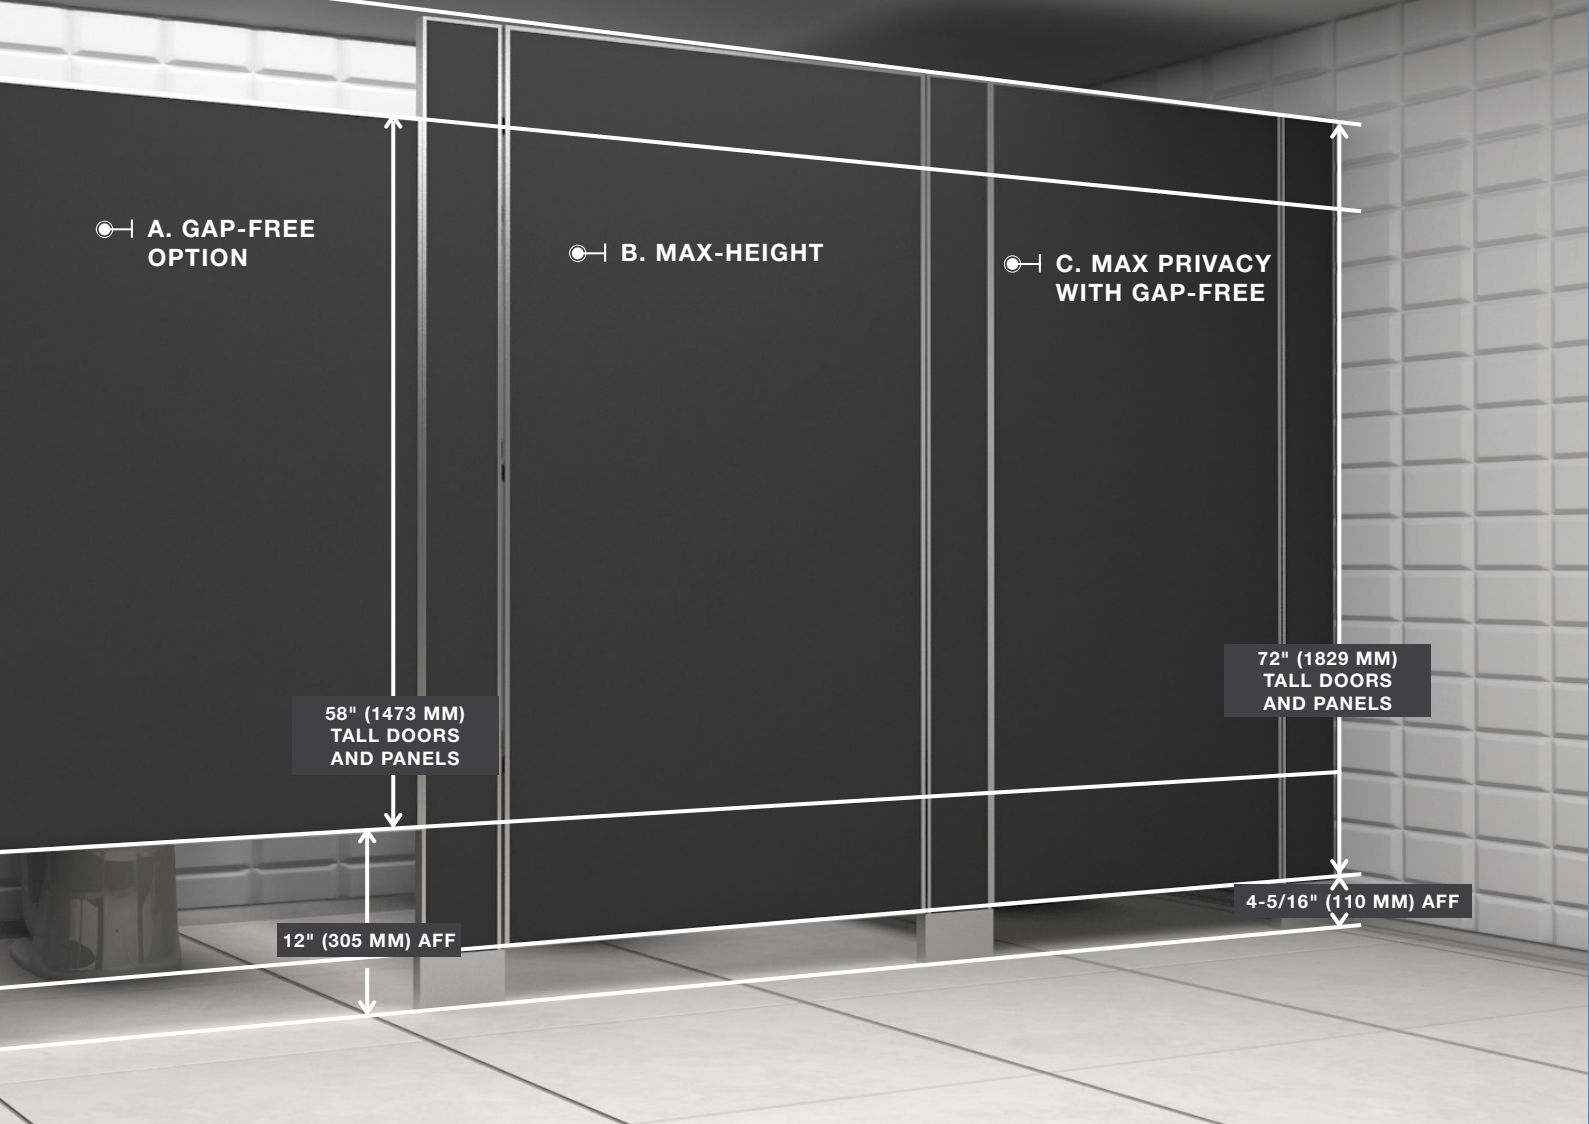

PRIVACY OPTIONS

Select from one of three options available for your material selection

		HPL	CL/SCRC
A	Gap-Free Option	Not Available	1080/1180, 1090, 2080/2180 or 2090
B	Max Height	2030 or 2040	2080/2180 or 2090
C	Max Privacy with Gap-Free	Not Available	2080/2180 or 2090



SPECIFICATION INFORMATION

PRIVACY OPTION SPECIFICATIONS



[Gap-Free No Sightlines Option and Maximum Height Option](#)

Include under design type section 2.2 of Compact Laminate or SCRC Toilet Partition Heading.

[Privacy Style Partitions](#)

No sightlines with Gap-Free interlocking doors and stiles routed 0.300" (7.6 mm) from the edge to allow for 0.175" (4.4 mm) overlap to prevent line-of-sight into the toilet compartment. Privacy strips fastened or adhered onto the partition material are not acceptable.



[Maximum Height](#)

Door/Panel Height: 72" (1829 mm)

Floor Clearance: 4-5/16" (110 mm)

Stile Height (varies depending on configuration selected)



[Tools and Resources at BOBRICK.COM](#)

GUIDE SPECIFICATION

<http://www.bobrick.com/bimobjects/Pages/GuideSpecifications.aspx>

SPEC COMPILER

<http://www.bobrick.com/bimobjects/Pages/ProductSpecCompiler.aspx>

SEARCH FOR YOUR LOCAL SALES REPRESENTATIVE

<http://www.bobrick.com/Pages/RepresentativeAndDistributorFinder.aspx>



BUILDING VALUE SINCE 1906

Customer Service: 818-982-9600
Email: customerservice@bobrick.com